


No guarantee is made that material will meet exactly the values shown.

HS-3E Test Cell

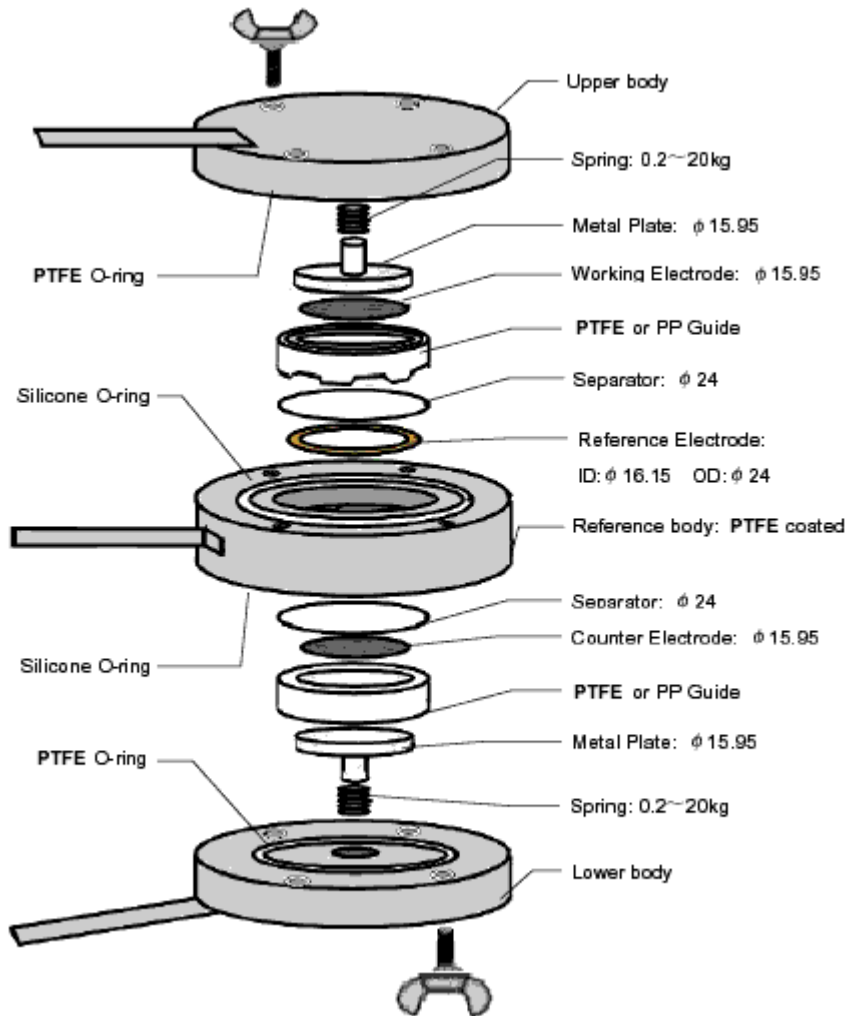

*The thickness of both electrodes and separator should be 0.8mm or thinner.

*Regular type is made of SUS304 for the bodies and other metal parts.

*Please inquire for other sizes and the details.

*Also available with aluminum body instead of SUS304.

This cell is a modified version of the HS Test Cell. By using an internal reference electrode, it is possible to measure cathode and anode electrical potential separately. Thus, the cathode and anode data become more reliable.





Application: Advanced energy
Product type: Hand tools
Production scale: Lab
Search tags: Hohsen, Hand tools, Test cell