

All technical data presented represent typical results, unless stated otherwise as min/max values. No guarantee is made that material will meet exactly the values shown.

Slitting Machine HSYK-10

-- Slitter: HSYK-10 --



Material: Electrodes for battery: Anode: Cu foil (Approx. 20 micron meter)
Cathode: Al foil (Approx. 20 micron meter)

Original Strips -----

Thickness: 50 – 350 micron meter
Width: 150 – 250 mm
Length: 500 – 1,000mm

Specifications -----

Method: Shear Cut

Slitting into: 2

Slitting Width: 54mm x 2 (Slitting Width is adjustable)
50mm x 2 (Slitting Width is adjustable)

Upper Blade: OD98 x ID66 x 0.7T mm

Bottom Blade: OD80 x ID55 x 10T mm


Speed: 3 – 30m/min

Motor: Geared Motor 2.2KW (inverter), GM-S, 1/10, by Mitsubishi

Power: 220V, 60Hz

Dimensions: 1,000W x 2,450L (1,450L) x 1,460H mm

Weight:

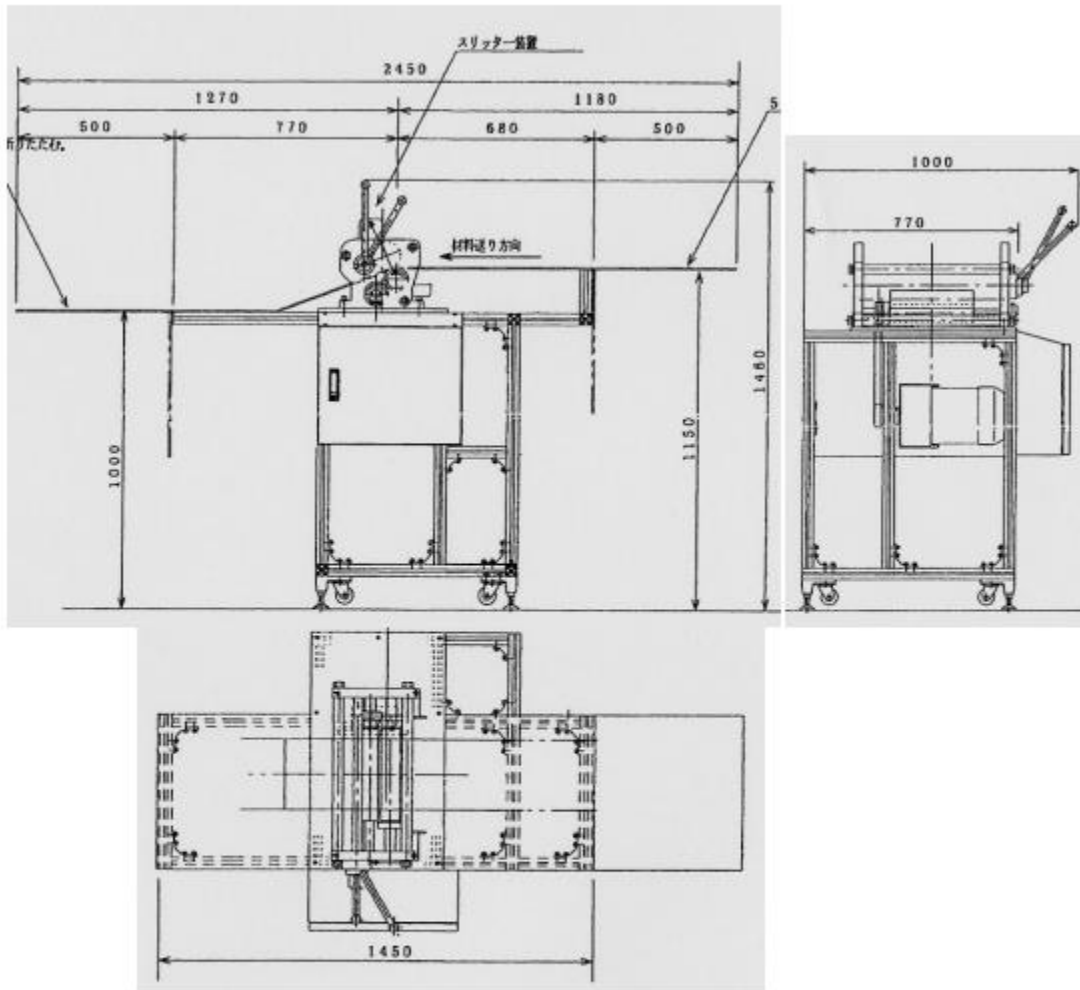

Application: Advanced energy
Product type: Machinery
Production scale: Lab, Pilot
Search tags: Hohsen, Machinery